

Mass series




High-quality battery
chargers and inverters

Maximum operational
safety

Suitable for the most
extreme conditions

The right choice for
demanding conditions

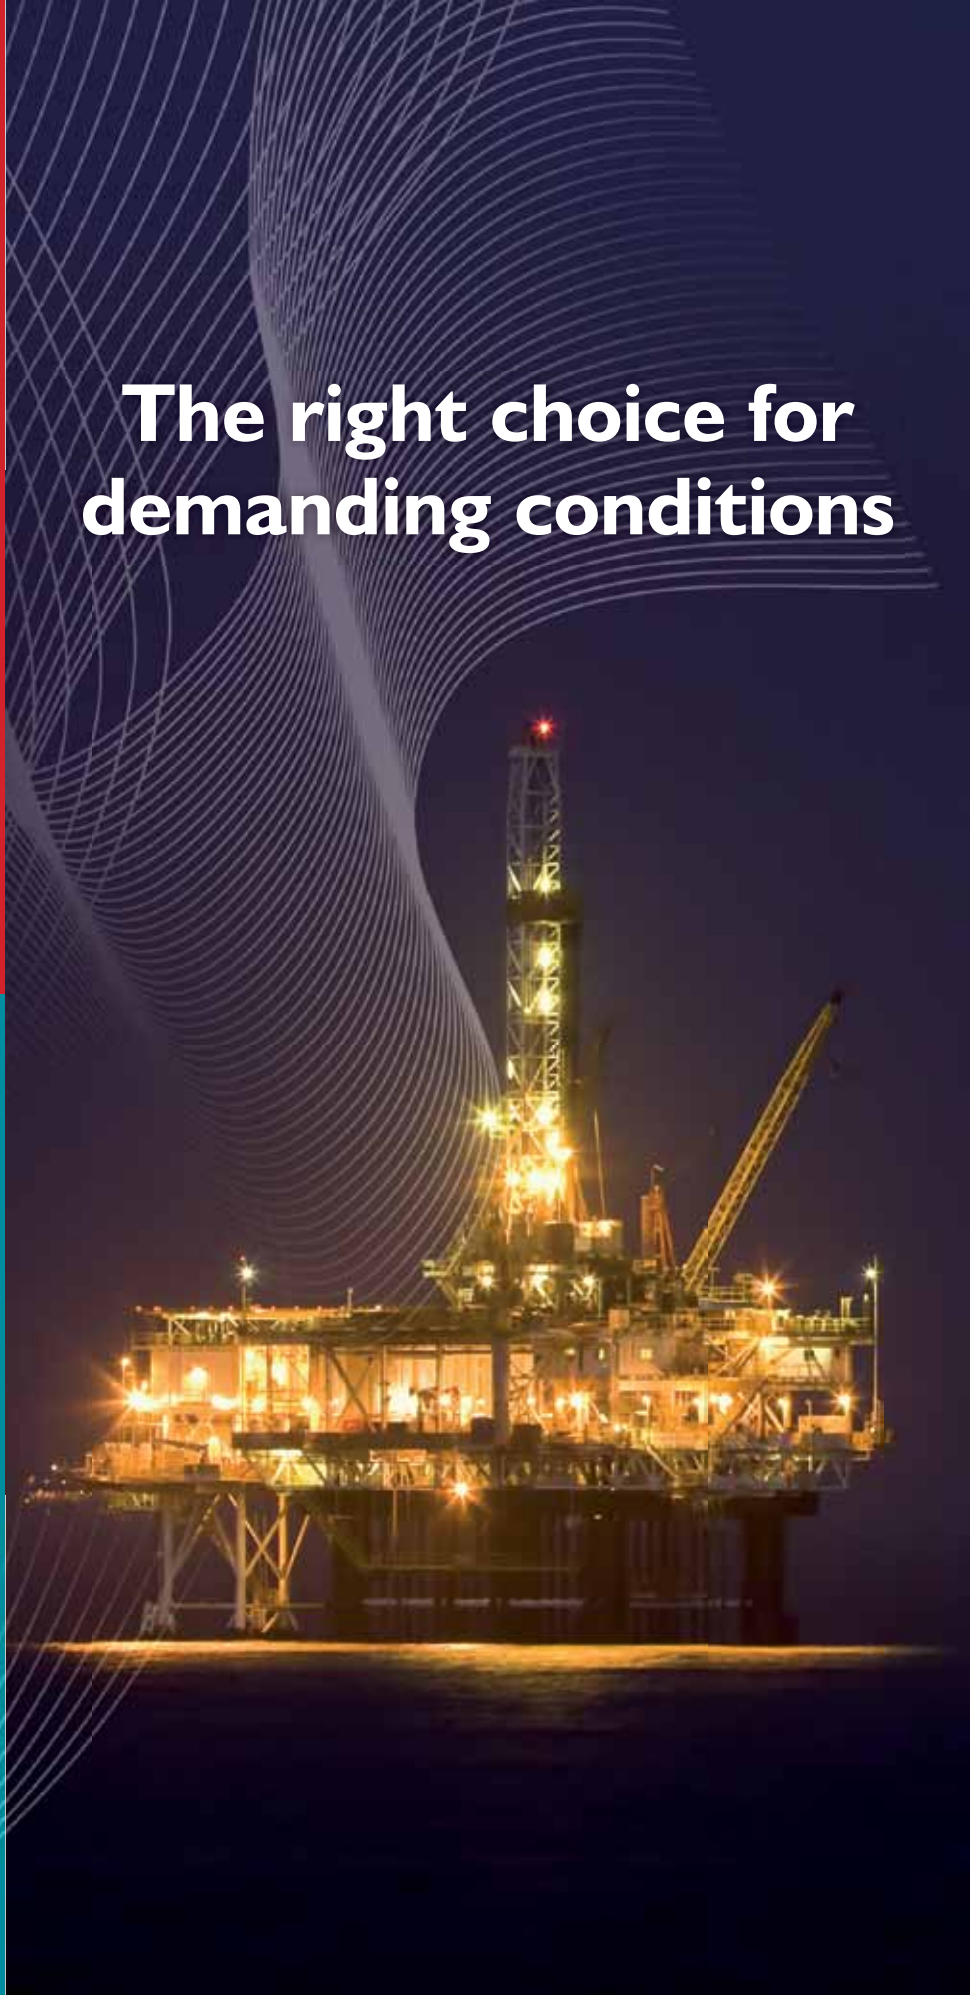

MASTERVOLT
THE POWER TO BE INDEPENDENT

For the toughest tasks

Mass battery chargers, sine wave inverters and DC-DC converters are designed for the toughest conditions for professional, semi-professional and recreational purposes. Even under the most extreme conditions the Mass battery chargers and inverters operate faultlessly, giving you round-the-clock output when necessary. The sustainability and technologies that underpin the Mass concept have long been proven in practice.

With an MTBF of 280,000 hours at full capacity and 24/7 use, the Mass products are ideal for the toughest tasks and any situation that requires a reliable power supply. You can always rely on their proven and technically advanced components.

Making the best even better

The reliability and long lifespan of Mastervolt's battery chargers, sine wave inverters and DC-DC converters have been established beyond doubt over the past decade. While the Mass products have evolved with the latest technological developments, the dimensions and connections have remained the same. As a result it is exceptionally easy to replace one unit with another with only negligible downtime.

Mastervolt Green by Heart

As part of our constant search for eco-friendly and long-lasting solutions, Mastervolt has developed the Green by Heart programme. Its impact on the Mass battery chargers, Mass Sine inverters and Mac & Magic DC-DC converters include:

- An exceptionally effective use of the consumed input current ($\cos \phi$) > 0.98!
- Faster charging of batteries, even when the input current is limited.
- Use of top quality components with a long lifespan.
- Savings in weight and space.
- Fewer installation materials.




More information?

Contact your nearest dealer or go to www.mastervolt.com



For professional use: GMDSS

Professional users will benefit from a front display with GMDSS alarm functions. GMDSS stands for Global Maritime Distress and Safety System, an internationally agreed-upon set of safety procedures, types of equipment, and communication protocols that is a requirement for the SOLAS (Safety Of Life At Sea) convention and uses DSC and satellite communication.



Made tough by smart design

The E-mark certified Mass battery chargers are very strong, designed to withstand heavy vibrations and shocks. Their premium quality components meet the highest possible specifications, while the smart and extra robust mounting adds to the professional end result.



MasterBus compatible

The Mass battery charger is fully MasterBus compatible. In combination with the MasterBus Inverter Interface or AC Power Analyser, you can easily connect every Mass Sine inverter within a MasterBus network. For the DC-DC converters you can use the MasterBus Serial Interface. All you need is a single cable with one connection. Your benefits: Fast and easy installation, plus centralised monitoring, configuration and operation of your system with a MasterView panel.

Easy and safe connection

Mass products are equipped with certified industrial connection technology. The larger inverter models have internal connections, the smaller models use a cable and plug & play socket.



Automatic switching


Easy to install within a mains voltage and/or generator power system, the Mass Sine inverter can switch between sources or combine the supply using the Masterswitch or Systemswitch system.



Powerful selling points

Mass battery chargers


- Designed for the most difficult conditions.
- Lightweight, stainless steel, anodised aluminium casing.
- Coating of internal components prevents damage from damp or condensation to ensure a longer lifespan.
- Insensitive to electromagnetic effects from other devices.
- Suitable for every type of battery, also charges entirely empty batteries.
- Delivered as standard with temperature sensor.
- Full power at temperatures of up to 45 °C.
- Load capacities from 80 to 1000 Ah or more.
- Stable power supply 12/24/48 V, even without batteries.
- Load sharing possible in case of limited power supply.
- Parallel switching possible using multiple battery chargers.
- Customised monitoring and controls at any location
- Fast and easy installation with MasterBus, Mastervolt's single cable system.
- Reliable charger/supply for GMDSS.
- Certified by Germanisch Lloyd, Lloyd, Bureau Veritas (24/75 & 24/100 models only) and RRR, RS; connections in accordance with CE, ABYC A-31 and IEC60945.
- Type approval for application in safety zones A, B and C.

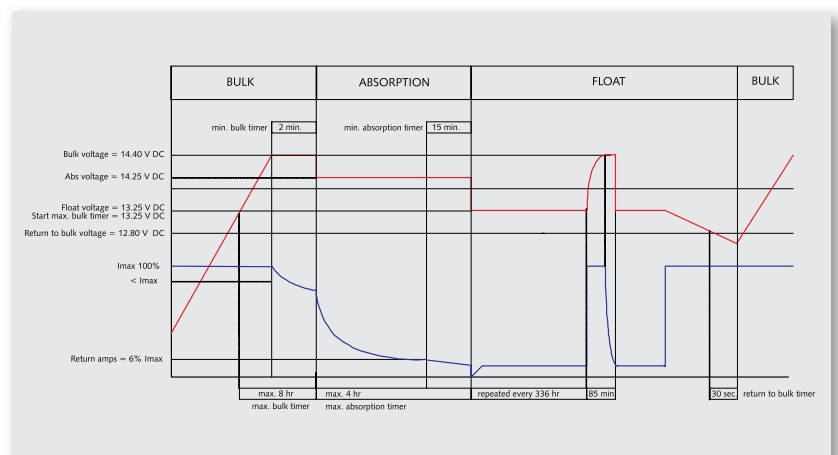


3-Step[⊕] charge method for fast and complete loading (IUoUo).

Mass Sine sine wave inverters


- Capacity between 800 W and 5 kW.
- Suitable for high starting/peak loads, even up to 200% at brief consumption .
- 230 V/50 Hz pure sine wave voltage; no faults or humming sounds from connected equipment, not even with sensitive communication and measuring equipment.
- Fully MasterBus compatible with AC Power Analyser or MasterBus Inverter Interface.
- All Mastervolt inverters provide pure sine wave voltage to ensure seamless operation of the connected equipment. Mastervolt inverters are the best choice available.

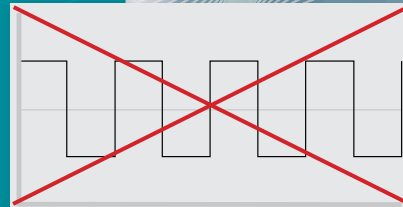

Square wave form.

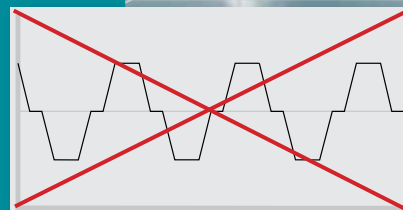


Modified sine wave output.

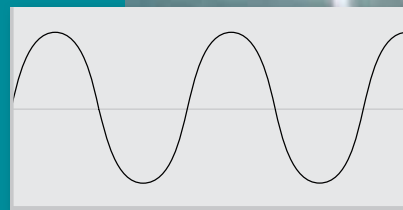

Sine voltage.

Mac & Magic DC-DC converters

- Reliable and very stable DC supply.
- For 12 and 24 V battery systems.
- Parallel switching of multiple units for capacities of 40, 60 or more Amps.
- Battery charger and dimmer function.
- Adjustable output voltage.
- Voltage stabilisation for a longer lifespan of halogen lights, etc.
- Corrosion-proof aluminium casing.
- Shock-proof.
- Temperature-powered fan for cooling.
- Generates limited heat, so installable almost anywhere.
- Fully MasterBus compatible with a MasterBus Serial Interface.

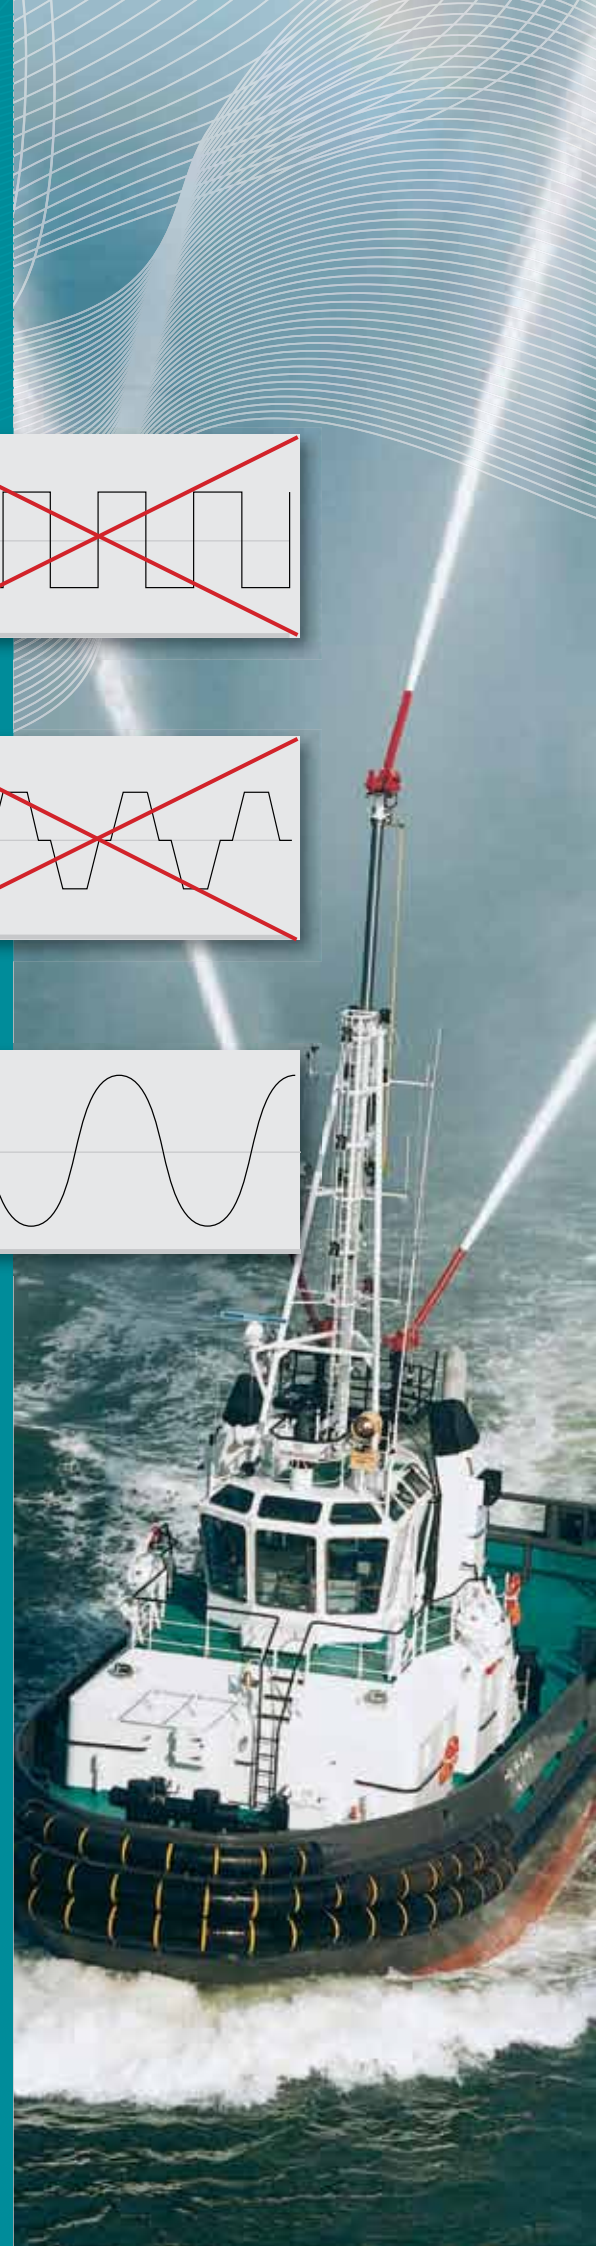

Specifications Mass battery chargers



Mass
12/60-2

Mass
12/80-2

Mass
24/15-2

Mass
24/25-2

Product code

40010606

40010806

40020156

40020256







GENERAL SPECIFICATIONS

Nominal output voltage	12 V	12 V	24 V	24 V
Total charge current	60 A at 14.25 V	80 A at 14.25 V	15 A at 28.5 V	25 A at 28.5 V
Number of battery outlets	2	2	2	2
Charge current second output	3 A	3 A	3 A	3 A
Recommended battery capacity	120-600 Ah	160-800 Ah	30-150 Ah	50-250 Ah
Nominal input voltage	230 V (180-265 V) – 50/60 Hz			
Supplies your system without battery	yes	yes	yes	yes
Display/read-out	LED display	LED display	LED display	LED display
Dimensions, hxwx d	340x261x130 mm 13.4x10.3x5.1 inch	340x261x130 mm 13.4x10.3x5.1 inch	325x220x111 mm 12.8x8.7x4.4 inch	325x220x111 mm 12.8x8.7x4.4 inch
Weight	4.6 kg / 10.1 lbs	4.6 kg / 10.1 lbs	3.3 kg / 7.3 lbs	3.3 kg / 7.3 lbs
Approvals*	CE, E-mark, ABYC A-31 / RRR, RS			

TECHNICAL SPECIFICATIONS

Charge characteristic**	IUoUo, automatic / 3-step+ for gel/AGM/wet/Lithium Ion			
Charge voltage Bulk (25 °C)***	14.25 V (8 hours)	14.25 V (8 hours)	28.5 V (8 hours)	28.5 V (8 hours)
Charge voltage Absorption (25 °C)***	14.25 V (4 hours)	14.25 V (4 hours)	28.5 V (4 hours)	28.5 V (4 hours)
Charge voltage Float - wet (25 °C)***	13.25 V	13.25 V	26.5 V	26.5 V
Charge voltage Float - gel/AGM (25 °C)***	13.8 V	13.8 V	27.6 V	27.6 V
Temperature compensation	-30 mV/°C	-30 mV/°C	-60 mV/°C	-60 mV/°C
Voltage compensation	voltage drop compensation in DC cables up to 3 Volt			
DC consumption	< 1 mA	< 1 mA	< 1 mA	< 1 mA
Full load consumption (230 V AC)	1100 W	1400 W	550 W	880 W
Cos phi	> 0.95	> 0.95	> 0.95	> 0.95
Temperature range (ambient temp.)	-25 °C to 80 °C. > 45 °C derating power			
Cooling	vario fan	vario fan	vario fan	vario fan
Sound level	< 48 dBA at 1 mtr	< 48 dBA at 1 mtr	< 48 dBA at 1 mtr	< 48 dBA at 1 mtr
Protection degree	IP23	IP23	IP23	IP23
Protections	over temperature, over load, short circuit, high battery, low battery			
MasterBus compatible	yes	yes	yes	yes
CSI/DC alarm (Charger Status Interface)	integrated in the battery charger as standard			

OPTIONS

MasterView Read-out (product code 77010050)		Remote panel for reading the charge status of your battery charger, including error notifications		
MasterView Easy (product code 77010305)		Touch screen panel for reading charge status, current fold-back and/or Power Sharing setting		
MasterShunt (product code 77020100)		MasterBus integrated battery monitor, with detailed information on the status of your batteries for a optimised charging process, incl. voltage, current, remaining time and consumption capacity in percentage		
MasterBus USB Interface (product code 77030100)		Communication port between MasterBus and the USB port of your PC; makes possible reading and configuration of your MasterBus system on the PC when combined with MasterView System software.		
MasterVision panels	Model C3-RS (product code 70403040)		Masterlink MICC (product code 70403105)	

* Check our website for the certificates per model.

** The charge characteristic can be set to your requirements.

*** The battery charge current can sometimes be specified at 20 °C, so take temperature compensation into account.

See www.mastervolt.com/chargers for detailed specifications, dimension drawings, certificates and manuals.



Mass	Mass	Mass	Mass	Mass	Mass	Mass
24/25-2 DNV	24/50-2	24/75	24/100	24/100-3ph	48/25	48/50
40720266	40020506	40020756	40021006	40031006	40040256	40040506
24 V	24 V	24 V	24 V	24 V	48 V	48 V
25 A at 28.5 V	50 A at 28.5 V	75 A at 28.5 V	100 A at 28.5 V	100 A at 28.5 V	25 A at 57 V	50 A at 57 V
2	2	1	1	1	1	1
3 A	3 A	n.a.	n.a.	n.a.	n.a.	n.a.
50-250 Ah	100-500 Ah	150-750 Ah	200-1000 Ah	200-1000 Ah	100-500 Ah	100-500 Ah
	230 V (180-265 V) – 50/60 Hz			3x400 V (360-485 V)	230 V (180-250 V) – 50/60 Hz	
yes	yes	yes	yes	yes	yes	yes
LED display	LED display	LED display	LED display	LED display	LED display	LED display
365x220x111 mm	340x261x130 mm	420x318x130 mm	420x318x130 mm	420x318x130 mm	420x318x130 mm	420x318x130 mm
14.4x8.7x4.4 inch	13.4x10.3x5.1 inch	16.5x12.5x5.1 inch	16.5x12.5x5.1 inch	16.5x12.5x5.1 inch	16.5x12.5x5.1 inch	16.5x12.5x5.1 inch
3.5 kg / 7.7 lbs	4.6 kg / 10.1 lbs	7.7 kg / 17 lbs	7.7 kg / 17 lbs	7.7 kg / 17 lbs	4.6 kg / 10.1 lbs	7.7 kg / 17 lbs
CE, E-mark, RRR, RS, ABYC A-31, DNV	CE, E-mark, RRR, RS, ABYC A-31	CE, E-mark, ABYC A-31, RRR, RS, Lloyds, Bureau Veritas, Germanischer Lloyds			CE, E-mark, ABYC A-31, RRR, RS	
		IUoUo, automatic / 3-step+ for gel/AGM/wet/Lithium Ion				
28.5 V (8 hours)	28.5 V (8 hours)	28.5 V (8 hours)	28.5 V (8 hours)	28.5 V (8 hours)	57 V (8 hours)	57 V (8 hours)
28.5 V (4 hours)	28.5 V (4 hours)	28.5 V (4 hours)	28.5 V (4 hours)	28.5 V (4 hours)	57 V (4 hours)	57 V (4 hours)
26.5 V	26.5 V	26.5 V	26.5 V	26.5 V	53 V	53 V
27.6 V	27.6 V	27.6 V	27.6 V	27.6 V	55.2 V	55.2 V
-60 mV/°C	-60 mV/°C	-60 mV/°C	-60 mV/°C	-60 mV/°C	-120 mV/°C	-120 mV/°C
		voltage drop compensation in DC cables up to 3 Volt				
< 1 mA	< 1 mA	< 1 mA	< 1 mA	< 1 mA	< 1 mA	< 1 mA
880 W	1800 W	2600 W	3500 W	3500 W	1800 W	3500 W
> 0.95	> 0.95	> 0.95	> 0.95	> 0.95	> 0.95	> 0.95
		-25 °C to 80 °C. > 45 °C derating power				
vario fan	vario fan	vario fan	vario fan	vario fan	vario fan	vario fan
< 48 dBA at 1 mtr	< 48 dBA at 1 mtr	< 48 dBA at 1 mtr	< 48 dBA at 1 mtr	< 48 dBA at 1 mtr	< 48 dBA at 1 mtr	< 48 dBA at 1 mtr
IP23	IP23	IP23	IP23	IP23	IP23	IP23
		over temperature, over load, short circuit, high battery, low battery				
yes	yes	yes	yes	yes	yes	yes
		integrated in the battery charger as standard				

Remote panel for reading the charge status of your battery charger, including error notifications

Touch screen panel for reading charge status, current fold-back and/or Power Sharing setting

MasterBus integrated battery monitor, with detailed information on the status of your batteries for a optimised charging process, incl. voltage, current, remaining time and consumption capacity in percentage

Communication port between MasterBus and the USB port of your PC; makes possible reading and configuration of your MasterBus system on the PC when combined with MasterView System software (free to download)

go to www.mastervolt.com/chargers for an extended overview of the MasterVision panels; QRS232 communication connection for all models.

Specifications Mass Sine sine wave inverters



Mass Sine
12/800
24010800



Mass Sine
12/1200
24011200



Mass Sine
12/2000
24012000

Product code 230 V





GENERAL SPECIFICATIONS

Nominal battery voltage	12 V	12 V	12 V
Recommended battery capacity	> 100 Ah	> 150 Ah	> 200 Ah
Output voltage ($\pm 5\%$)	230 V – 50 Hz (± 0.01 Hz)		
P30 power at 40 °C, cos phi I	800 W	1200 W	2000 W
Continuous power at 40 °C, cos phi I	650 W	1000 W	1800 W
Peak load	1600 W	2400 W	4000 W
Output waveform	true sine		
Efficiency	92%	92%	92%
Display/read-out	LED display		
Dimensions, hxxwxd	325x220x111 mm 12.8x8.7x4.4 inch	340x261x130 mm 13.4x10.3x5.1 inch	420x318x136 mm 16.5x12.5x5.4 inch
Weight	3,9 kg / 8.6 lbs	8 kg / 17.4 lbs	14,6 kg / 32.2 lbs
Approvals	CE, E-mark, ABYC A-31		

TECHNICAL SPECIFICATIONS

Technology	HF switch mode		
Low battery voltage, switches off at	10 V, $\pm 0,5$ V	10 V, $\pm 0,5$ V	10 V, $\pm 0,5$ V
Low battery voltage, switches on at	11 V, $\pm 0,5$ V	11 V, $\pm 0,5$ V	11 V, $\pm 0,5$ V
High battery voltage, switches off at	15,5 V, $\pm 0,5$ V	15,5 V, $\pm 0,5$ V	15,5 V, $\pm 0,5$ V
High battery voltage, switches on at	14,5 V, $\pm 0,5$ V	14,5 V, $\pm 0,5$ V	14,5 V, $\pm 0,5$ V
Max. ripple on DC (battery)	5% RMS	5% RMS	5% RMS
Input current (nominal load)	73 A	110 A	183 A
No load power consumption:			
• 'on' mode (230 V)	470 mA – 5,6 W	450 mA – 5 W	480 mA – 6 W
• stand-by (scan mode)	65 mA – 0,8 W	43 mA – 0,5 W	50 mA – 0,6 W
Minimal DC fuse (slow blow)*	100 A	150 A	250 A
Minimal cable size	25 mm ²	50 mm ²	70 mm ²
Harmonic distortion typical	< 5%	< 5%	< 5%
Cos Phi	all power factors allowed		
Temperature range (ambient temp.)	-25 °C to 80 °C, > 40 °C derating power		
Cooling	natural/forced		
Sound level	48 dBA at 1 mtr		
Protection degree	IP23	IP23	IP23
Protections	over temperature, over load, short circuit, high battery, low battery		
MasterBus compatible	yes, using a MasterBus Inverter Interface or AC power analyser		
AC connection	internal	internal	internal

OPTIONS

Model C4-RI (product code 70404110)		Remote control on/off for the Mass Sine sine wave inverter.
Masterlink/MICC (product code 70403105)		Battery consumption meter for 2 batteries, 12/24 V DC with LCD read-out, remote control for Mass Sine inverter and Mass battery charger or Mass Combi.
MasterBus Inverter Interface (product code 77030700)		Integrates the Mass Sine inverter in a MasterBus network
AC power analyser (product code 77031200)		Integrates the Mass Sine inverter in a MasterBus network and visualizes the AC voltage, current and power
Transfer system		The Masterswitch and Systemswitch can be connected to all inverters.

* DC fuse depends on the cable size.

See www.mastervolt.com/inverters for detailed specifications, dimension drawings, certificates, manuals and the 120 V models.



Mass Sine
24/800
24020800



Mass Sine
24/1500
24021500



Mass Sine
24/2500
24022500



Mass Sine
24/5000
24095100



Mass Sine
48/2500
24026000

24 V	24 V	24 V	24 V	24 V
> 50 Ah	> 150 Ah	> 200 Ah	> 400 Ah	> 500 Ah
230 V – 50 Hz (± 0.01 Hz)				
800 W	1500 W	2500 W	5000 W	10 kW
650 W	1200 W	2000 W	4000 W	8 kW
1600 W	2900 W	5000 W	9000 W	20 kW
true sine				
92%	92%	92%	92%	92%
LED display				
325x220x111 mm	340x261x130 mm	420x318x130 mm	470x315x254 mm	2x 460.5x318x143 +
12.8x8.7x4.4 inch	13.4x10.3x5.1 inch	16.5x12.5x5.1 inch	18.5x12.4x10 inch	475.5x318x254 mm
3,9 kg / 8.6 lbs	8 kg / 17.4 lbs	14,6 kg / 32.2 lbs	25 kg / 55.1 lbs	44 kg / 97 lbs
CE, E-mark, ABYC A-31				

HF switch mode				
19 V, ± 0,5 V	19 V, ± 0,5 V	19 V, ± 0,5 V	19 V, ± 0,5 V	19 V, ± 0,5 V
22 V, ± 0,5 V	22 V, ± 0,5 V	22 V, ± 0,5 V	22 V, ± 0,5 V	22 V, ± 0,5 V
32 V, ± 0,5 V	32 V, ± 0,5 V	33 V, ± 0,5 V	32 V, ± 0,5 V	32 V, ± 0,5 V
30 V, ± 0,5 V	30 V, ± 0,5 V	31 V, ± 0,5 V	30 V, ± 0,5 V	31 V, ± 0,5 V
5% RMS	5% RMS	5% RMS	5% RMS	5% RMS
36 A	68 A	115 A	230 A	4x 120 A
240 mA – 5,6 W	200 mA – 5 W	250 mA – 6 W	250 mA – 6 W	180 W
35 mA – 0,8 W	25 mA – 0,6 W	25 mA – 0,6 W	n.a.	< 10 W, 412 mA
63 A	100 A	160 A	1x 250 A of 2x 125 A	4x 160 A
16 mm ²	25 mm ²	50 mm ²	2x 70 mm ²	4x 50 mm ²
< 5%	< 5%	< 5%	< 5%	2,5%
all power factors allowed				
-25 °C to 80 °C, > 40 °C derating power				
natural/forced				
48 dBA at 1 mtr				
IP23	IP23	IP23	IP23	IP23
over temperature, over load, short circuit, high battery, low battery				
yes, using a MasterBus Inverter Interface or AC power analyser				
internal	internal	internal	internal	internal

Remote control on/off for the Mass Sine sine wave inverter.

Battery consumption meter for 2 batteries, 12/24 V DC with LCD read-out, remote control for Mass Sine inverter and Mass battery charger or Mass Combi.

Integrates the Mass Sine inverter in a MasterBus network

Integrates the Mass Sine inverter in a MasterBus network and visualizes the AC voltage, current and power

The Masterswitch and Systemswitch can be connected to all inverters.

Specifications Mac & Magic converters



Mac 24/12-20

Magic 24/12-20

Magic 24/24-20

Product code

81200100

81300100

81300200

SPECIFICATIONS INPUT

Nominal input voltage	24 V	24 V	24 V
Input range	20-32 V DC	19-32 V DC	19-32 V DC
Input range, 3-step charge mode	_____	24-32 V DC	_____
Lower input set point	_____	20 V DC*	_____
Delay lower input set point	_____	30 sec.*	_____

SPECIFICATIONS OUTPUT

Factory setting	13,6 V DC*	13,6 V DC*	27,2 V DC*
Voltage adjustable*	10-15 V DC	10-15 V DC	20-28,5 V DC
Output voltage dimmer*	4-13 V DC	4-13 V DC	8-26 V DC
Stabilised	_____	2% at extremes of temperatures, load and input	_____
Ripple	_____	max. 1% peak peak	_____
Power (max./nominal)	300 / 270 W	300 / 300 W	580 / 580 W
Max. current	20 A	20 A	20 A
Charge current - 3-step mode	16 A	16 A	16 A




GENERAL SPECIFICATIONS

Galvanic isolation	no	yes	yes
Voltage limited	yes	yes	yes
Efficiency	_____	>90% (volland bij nom. ingangsspanning); 92% piek	_____
Protected against over load	yes	yes	yes
Protected against over temperature	yes	yes	yes
Dimmer function	_____	yes, by external momentary switch via fast-on connection, to be activated by DIP-switch setting	_____
Alarm contact	no	yes (fast-on connector)	yes (fast-on connector)
Dimensions, hxwx d	190x130x61 mm	227x154x81 mm	227x154x81 mm
	7.5x5.1x2.4 inch	8.9x6.1x3.2 inch	8.9x6.1x3.2 inch
Weight	1,0 kg / 2.2 lbs	1,8 kg / 4 lbs	1,8 kg / 4 lbs
Approvals	_____	CE	_____

TECHNICAL SPECIFICATIONS

3-Step charge option	_____	yes (DIP switch settings)	_____
DC consumption	< 30 mA	< 115 mA	< 115 mA
Connections input/output	_____	screw terminals, maximum wire size 16 mm ² / AWG5	_____
Temperature range (ambient temp.)	_____	-25 °C to 80 °C, > 40 °C derating power	_____
Cooling	natural cooling	_____	maintenance free vario fans
Sound level	< 30 dBA at 1 mtr	_____	< 48 dBA at 1 mtr
Protection degree	IP21	IP21	IP21
MasterBus compatible	_____	yes, by means of MasterBus Serial Interface (product code 77030450)	_____

OPTIES

PC-Link (product code 21730100)		Interface between Magic converter and PC, in combination with the MasterAdjust software (free to download) The PC-Link can be directly connected to a computer serial port.
MasterView Easy (product code 77010305)		Touch screen panel for reading status and dimmer function settings
MasterBus Serial Interface (product code 77030450)		Integrates the Mac & Magic converters in a MasterBus network

* Adjustable with MasterAdjust software.

See www.mastervolt.com/dcdc-converters for detailed specifications, dimension drawings, certificates and manuals.



Magic 12/12-20
81300400



Magic 12/24-10
81300300

12 V		12 V
_____	11-16 V DC	_____
_____	12-16 V DC	_____
_____	10 V DC*	_____
_____	30 sec.*	_____


13,6 V DC*	27,2 V DC*
10-15 V DC	20-28,5 V DC
4-13 V DC	8-26 V DC
_____	2% at extremes of temperatures, load and input
_____	max. 1% peak peak
300 / 300 W	300 / 300 W
20 A	10 A
16 A	8 A

yes	yes
yes	yes
>90% (voltage bij nom. ingangsspanning); 92% piek	
yes	yes
yes	yes
yes, by external momentary switch via fast-on connection, to be activated by DIP-switch setting	
yes (fast-on connector)	yes (fast-on connector)
227x154x81 mm	227x154x81 mm
8.9x6.1x3.2 inch	8.9x6.1x3.2 inch
1,8 kg / 4 lbs	1,8 kg / 4 lbs
_____	CE

_____	yes (DIP switch settings)	_____
< 115 mA	< 115 mA	
screw terminals, maximum wire size 16 mm ² / AWG5		
-25 °C to 80 °C, > 40 °C derating power	_____	
_____	maintenance free vario fans	_____
_____	< 48 dBA at 1 mtr	_____
IP21	IP21	
yes, by means of MasterBus Serial Interface (product code 77030450)		


Touch screen panel for reading status and dimmer function settings

Integrates the Mac & Magic converters in a MasterBus network

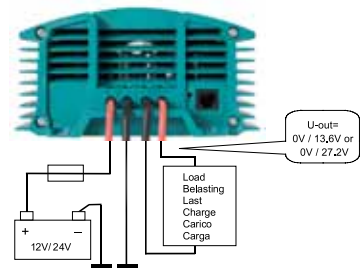


Magic as power supply

The Magic models can be fully used as a stabilised power supply: From 12 to 24 V, from 24 to 12 V or from 24 to 24 V. Inputs and outputs are galvanically isolated.

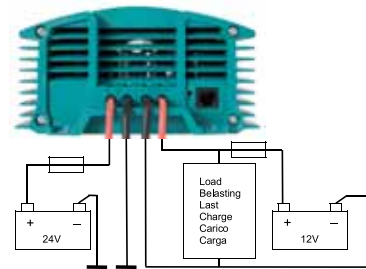

Mac & Magic as battery charger

12 V starter or emergency power batteries can be charged and monitored by a Mac or Magic converter. The charging method is identical to Mastervolt's Mass products (3-step technology), and voltage levels are adjustable using the MasterBus PC-Link/MasterAdjust software.




Mac or Magic as dimmer

Lights can be dimmed by means of a push button or pulse switch, with a maximum load of 250 Watt for the Mac. A second Mac can be installed when using multiple lamps.

Mastervolt products in a professional system

- Ideal as back-up system.
- 230 Volt without generator.
- Certified products for professional use in the most extreme conditions.

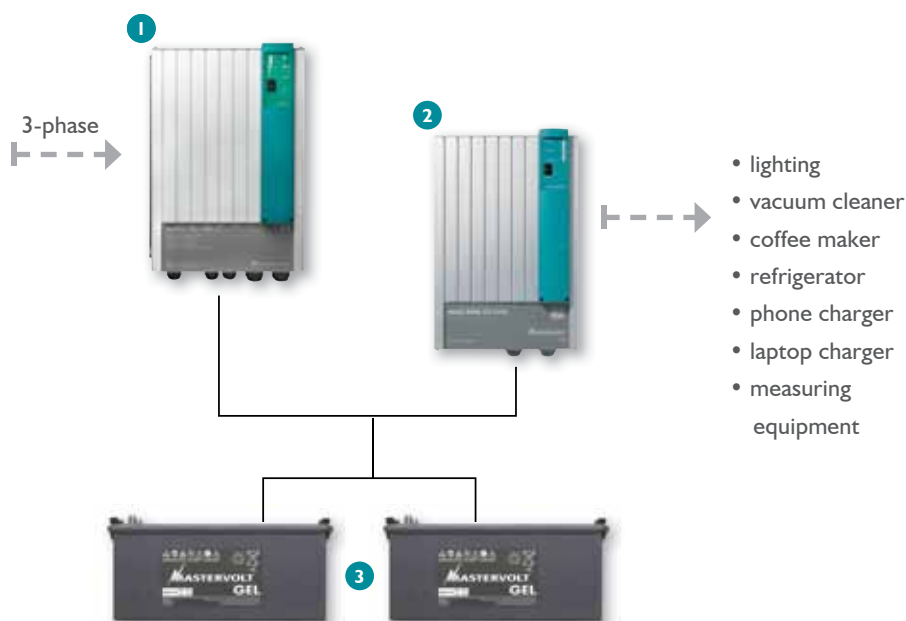

- 1 Mass 24/100-3ph battery charger.
- 2 Mass 24/2500 sine wave inverter.
- 3 MVG 12/200 service battery.

Mastervolt BV
Snijdersbergweg 93
1105 AN AMSTERDAM ZO
The Netherlands
T +31 (0)20 34 22 100
F +31 (0)20 34 22 169
E info@mastervolt.com



More information? See

www.mastervolt.com